


# Specifications

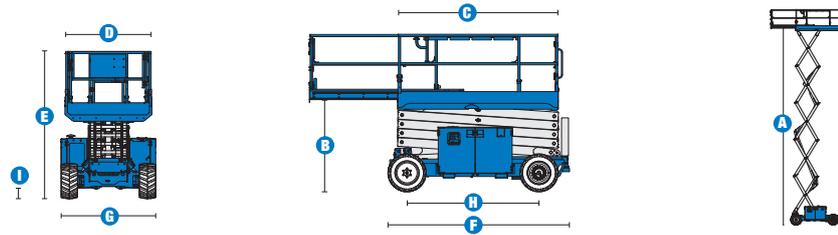

MODELS	GS™-2669 RT		GS™-3369 RT		GS™-4069 RT	
MEASUREMENTS	Metric	US	Metric	US	Metric	US
Working height maximum*	9.9 m	32 ft	11.96 m	39 ft	14.2 m	46 ft
<b>A</b> Platform height maximum	7.9 m	26 ft	9.96 m	32 ft 8 in	12.2 m	40 ft
<b>B</b> Platform height - stowed	1.47 m	4 ft 10 in	1.47 m	4 ft 10 in	1.65 m	5 ft 5 in
<b>C</b> Platform length - outside	2.79 m	9 ft 2 in	2.79 m	9 ft 2 in	2.79 m	9 ft 2 in
- extended	3.71 m	12 ft 2 in	3.71 m	12 ft 2 in	3.71 m	12 ft 2 in
Slide-out platform extension deck	0.91 m	3 ft	0.91 m	3 ft	0.91 m	3 ft
<b>D</b> Platform width - outside	1.6 m	5 ft 3 in	1.6 m	5 ft 3 in	1.6 m	5 ft 3 in
Toeboard height	0.15 m	6 in	0.15 m	6 in	0.15 m	6 in
<b>E</b> Height - stowed**	2.59 m	8 ft 6 in	2.59 m	8 ft 6 in	2.74 m	9 ft
rails lowered	1.92 m	6 ft 3.5 in	1.92 m	6 ft 3.5 in	2.08 m	6 ft 10 in
<b>F</b> Length - stowed	3.12 m	10 ft 3 in	3.12 m	10 ft 3 in	3.12 m	10 ft 3 in
platform extended	3.9 m	12 ft 10 in	3.9 m	12 ft 10 in	3.9 m	12 ft 10 in
with outriggers	3.76 m	12 ft 4 in	3.76 m	12 ft 4 in	3.76 m	12 ft 4 in
<b>G</b> Width	1.75 m	5 ft 9 in	1.75 m	5 ft 9 in	1.75 m	5 ft 9 in
<b>H</b> Wheelbase	2.29 m	7 ft 6 in	2.29 m	7 ft 6 in	2.29 m	7 ft 6 in
<b>I</b> Ground clearance - center	0.24 m	9.5 in	0.24 m	9.5 in	0.24 m	9.5 in

PRODUCTIVITY						
Maximum platform occupancy (in/out)	4/4		4/2		3/2	
Lift capacity	680 kg	1,500 lbs	454 kg	1,000 lbs	363 kg	800 lbs
Drive height	Full height		Full height		Full height	
Drive speed - stowed	5.6 km/h	3.5 mph	5.6 km/h	3.5 mph	5.6 km/h	3.5 mph
Drive speed - raised	0.5 km/h	0.3 mph	0.5 km/h	0.3 mph	0.5 km/h	0.3 mph
Gradeability - stowed***	40%		35%		35%	
Maximum outrigger leveling:	Front/back uphill		5.3°/4.2°		5.3°/4.2°	
side to side	11.7°		11.7°		11.7°	
Turning radius - inside	2.11 m	83 in	2.11 m	83 in	2.11 m	83 in
Turning radius - outside	4.6 m	181.2 in	4.6 m	181.2 in	4.6 m	181.2 in
Raise/lower speed	26/33 sec		42/28 sec		69/46 sec	
Controls	proportional		proportional		proportional	
Drive	four wheel		four wheel		four wheel	
Tyres - rough terrain	30x66 cm	12x26 in	30x66 cm	12x26 in	30x66 cm	12x26 in

POWER						
Power source	Kubota DF-972 gas/LPG 29 hp, Kubota D-1105 Diesel 24.8 hp, Perkins 403D-11 Diesel 25 hp					
Fuel tank capacity	37.9 L	10 gal	37.9 L	10 gal	37.9 L	10 gal
Hydraulic system capacity	68.1 L	18 gal	68.1 L	18 gal	68.1 L	18 gal

SOUND & VIBRATION LEVELS						
Sound pressure level (ground workstation)	85 dBA	85 dBA	85 dBA	85 dBA	85 dBA	85 dBA
Sound pressure level (platform workstation)	79 dBA	79 dBA	79 dBA	79 dBA	79 dBA	79 dBA
Vibration	<2.5 m/s <sup>2</sup>	<8 ft 2 in/s <sup>2</sup>	<2.5 m/s <sup>2</sup>	<8 ft 2 in/s <sup>2</sup>	<2.5 m/s <sup>2</sup>	<8 ft 2 in/s <sup>2</sup>

WEIGHT****						
CE base machine	3,309 kg	7,295 lbs	3,490 kg	7,695 lbs	4,647 kg	10,245 lbs
The basic unit has the extension deck, no outriggers, foam filled RT tyres (or non marking RT tyres as option), CE link guard and CE load sense						
Weight modifiers for options:						
Outriggers	add 392 kg	865 lbs	add 392 kg	865 lbs	add 392 kg	865 lbs
Generator	add 73 kg	160 lbs	add 73 kg	160 lbs	add 73 kg	160 lbs

**STANDARDS COMPLIANCE** CE EN280, PB-10-611-03

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.  
 \*\* Based on RT tyres. Deduct 5.08 cm (2 in) for non-marking tyres.  
 \*\*\* Gradeability applies to driving on slopes. Gradeability may vary depending on the weight of options installed on machine. See Operator's Manual for details regarding slope ratings.  
 \*\*\*\* Weight will vary depending on options and/or country standards

# Features

## STANDARD FEATURES

### MEASUREMENTS

#### GS™-2669 RT

- 9.9 m (32 ft) working height
- Up to 680 kg (1,500 lb) lift capacity

#### GS™-3369 RT

- 11.96 m (39 ft) working height
- Up to 454 kg (1,000 lb) lift capacity

#### GS™-4069 RT

- 14.2 m (46 ft) working height
- Up to 363 kg (800 lb) lift capacity

### PRODUCTIVITY

- 2.79 x 1.6m (110 x 63 in) steel frame platform with replaceable aluminum deck
- 0.91 m (3 ft) extension deck
- Folding guardrails
- Proportional lift and drive
- Onboard diagnostic system
- AC power to platform
- Full height swing gate
- 4x4
- Front oscillating axle
- Positive traction control
- Four-wheel dynamic braking
- Swing-out engine tray
- Foam-filled rough terrain tyres
- Tilt level sensor with audible alarm
- Descent alarm
- Horn
- Hour meter
- Certified loadsensor

### POWER

- Kubota DF-972 gas/LPG 29 hp
- Kubota D-1105 Diesel 24.8 hp
- Perkins 403D-11 Diesel 25 hp



## OPTIONS & ACCESSORIES

### PRODUCTIVITY

- Automatic levelling hydraulic outriggers
- Air line to platform
- Power to platform (incl. plug, socket/ ground fault interrupt earth leakage on request)
- Non-marking, foam filled, rough terrain tyres
- Dual flashing beacons
- Platform work lights\*
- Motion alarm
- Biodegradable hydraulic oil

### POWER OPTIONS

- 3000 AC Watt generator with hydraulic oil cooler
- Diesel Scrubber (Perkins)
- Engine heater (Kubota)
- Hydraulic oil cooler
- LPG steel tank only, 33.5 lb capacity
- Soot filter
- Spark arrestor
- Electric Chalwyn valve
- Mechanical Chalwyn Valve
- Refinery kit (spark arrestor + electric or mechanical Chalwyn valve)

\*Available aftermarket only

### Enquiries from Europe:

Tel: +31 165 519 361  
Fax: +31 165 511 148  
Email: AWP-InfoEurope@terex.com

### Offices:

#### France

Tel: +33 (0)2 37 26 09 99  
Fax: +33 (0)2 37 26 09 98

#### Germany

Tel: +49 (0)4221 491 810  
Fax: +49 (0)4221 491 820

#### Spain

Tel: +34 93 572 50 90  
Fax: +34 93 572 50 91

#### Scandinavia

Tel: +46 31 57 51 00  
Fax: +46 31 57 51 04

#### The Netherlands

Tel: +31 165 519 361  
Fax: +31 165 511 148

#### UK

The Maltings  
Wharf Road  
Grantham NG31 6BH  
UK  
Tel: +44 (0)1476 584333  
Fax: +44 (0)1476 584334

#### Middle East

Tel: +971 4 399 0381  
Fax: +971 4 399 0382  
Email: AWP.Infome@terex.com

#### Russia & CIS countries

Tel: +7 495 660 32 30  
Fax: +7 495 660 32 29  
Email: info@terexrus.ru

### Corporate Headquarters:

#### United States

18340 NE 76th Street  
P.O. Box 97030  
Redmond, WA  
USA 98073-9730  
Tel: +1 425 881-1800  
Fax: +1 425 883-3475

### Distributed By: